

AC Current Transducer CVQ 301H

$I_{PN}=37.5-75-150-300A$

Transducer for the electronic measurement of AC sinusoidal waveforms,
 with galvanic isolation between the primary (High power) and the
 secondary circuit (Electronic circuit).



RoHS COMPLIANT



● Operating performances (AT =25°C)

Primary current	I_{PN}	37.5,75,150,300	A
Output signal	I_{OUT}	4~20	mA/dc
Supply voltage ($\pm 10\%$)	V_{CC}	18	Vdc
Load resistance	R_L	< 250	Ω
Accuracy	ε_L	± 1	%
Linearity	L	± 0.2	%
RMS Isolation voltage test, 50Hz,1min	X	2	KV
Frequency bandwidth	f	40~400	Hz

● General data

Operating temperature	T_O	-25~+70°C
Storage temperature	T_S	-40~+80°C
Operating Humidity		0 - 95 % RH
Storage Humidity (Non-Condensing)		0 - 98 % RH
Mass	m	130g
Note		Insulated plastic case recognized according to UL 94-V0

● Features

- | | |
|----------------------------|-----------------|
| ◆AC sinusoidal measurement | ◆Panel mounting |
| ◆Average responding | ◆Current output |

● Applications


- | | |
|----------------------|---|
| ◆ Automation systems | Analog current reading for remote monitoring(e.g.motor) |
| ◆ Panel meters | Simple connection displays power consumption. |

● Advantages


- | | |
|----------------|--|
| ◆Easy to mount | ◆High isolation between primary and secondary circuits |
|----------------|--|

Connection


DC POWER SUPPLY AMPERE METER

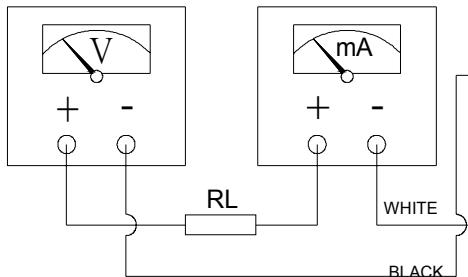


TRANSDUCER

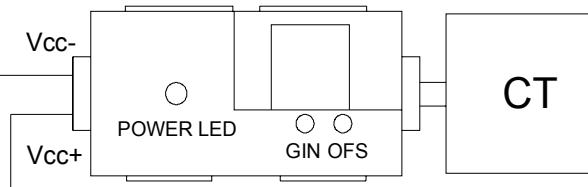


Dimensions (unit: mm)

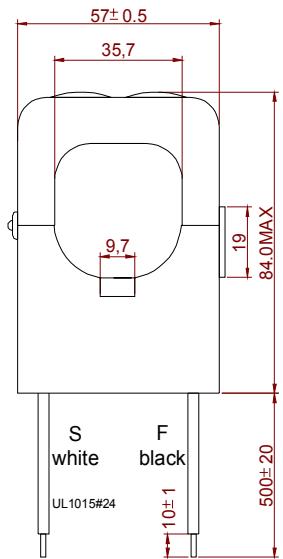

Front view

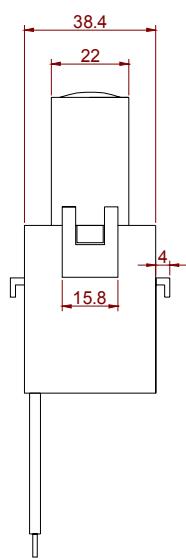

Right view



0-37.5 A

0-75 A


0-150 A

0-300 A


DIP SWITCH SETTING



LABLE

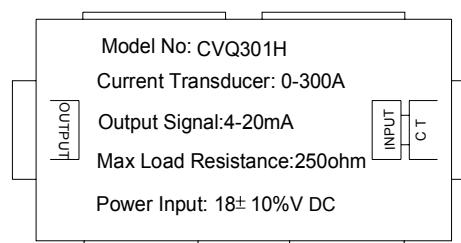

Bottom view



Remarks

Temperature of the primary conductor should not exceed 60