

AFG 60-LD




HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE
MOTOR TYPE

Metal / Aluminum
Aluminum, Ø60mm
Ball
85VAC to 125VAC for 115V Type
185VAC to 245VAC for 230V type
1,500VAC for 1 minute
Class A
10M Ohms Min.@500 VDC
0°C to +45°C
Impedance Protected
880g
Yes
Shaded Pole Motor

DIMENSION

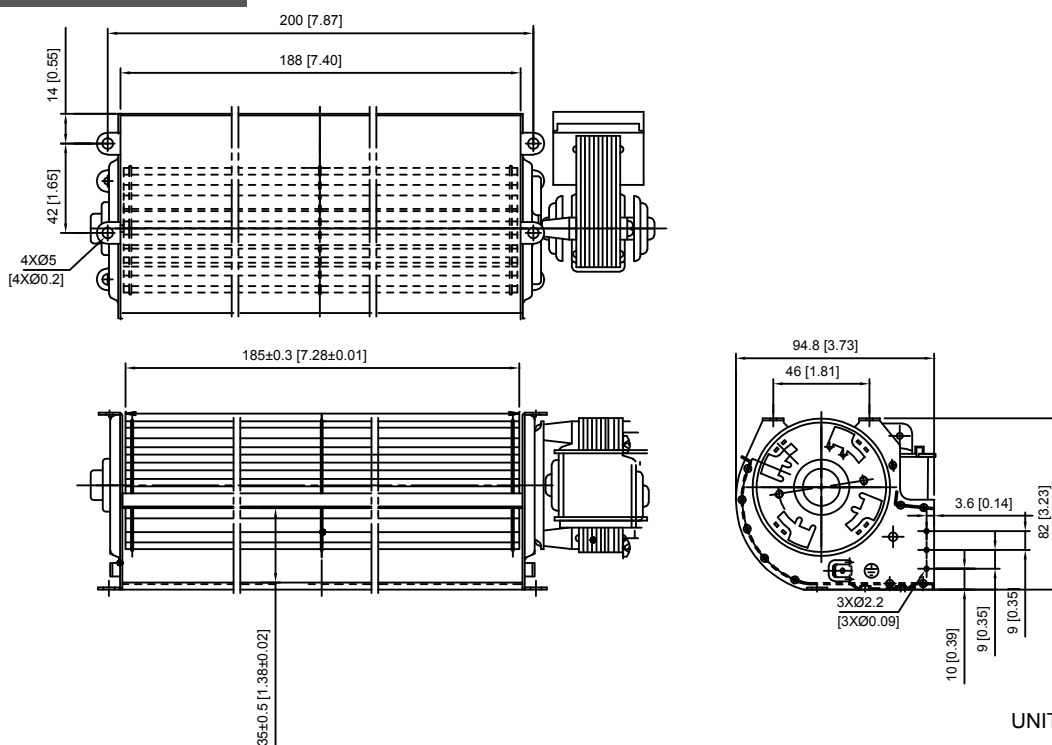

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
AFG60200V1H-LD	115	60	0.3	20.1	1290	0.12 3.1	60 1.7	34

AIR PERFORMANCE

