

AB 242291




242x240x291mm
(9.52"x9.44"x11.45")



HOUSING
IMPELLER
BEARING
TERMINATION
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE
IP LEVEL

Steel
Aluminum
Ball
Lead Wire
0°C to + 55°C
10M Ohms min.@500VDC
1,500VAC for 1 minute
6.1 kg
YES
IP44 included

DIMENSION

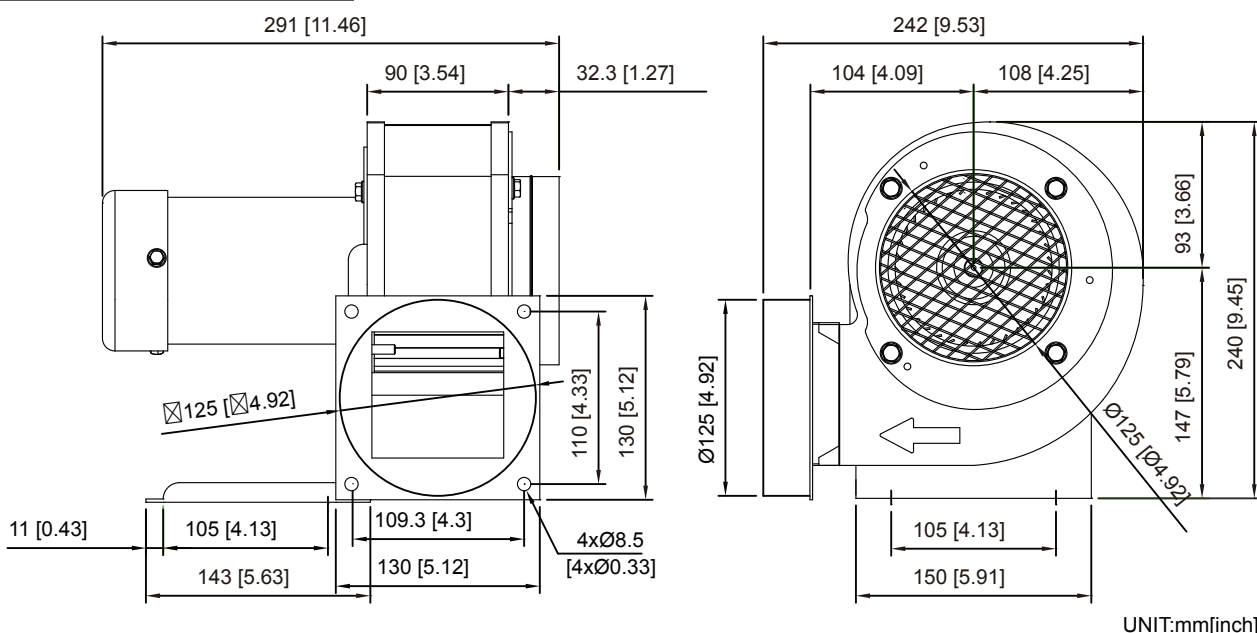

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
AB242291V1H2PS	110	50/60	2.40/3.00	200	2800/3480	1.81/2.62	46.0/66.6	335/409	9.5/11.6	80
AB242291V2H2PS	220	50/60	1.20/1.50	200	2800/3480	1.81/2.62	46.0/66.6	335/409	9.5/11.6	80
AB242291V2H2PT	220	50/60	0.80/1.00	200	2800/3480	1.81/2.62	46.0/66.6	335/409	9.5/11.6	80
AB242291V3H2PT	380	50/60	0.45/0.55	200	2800/3480	1.81/2.62	46.0/66.6	335/409	9.5/11.6	80

AIR PERFORMANCE

