

A17251-DA




172x172x51mm
(6.8"x5.9"x2")



HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE
DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Thermoplastic PBT, UL94V-0
Ball
Shaded Pole Motor
Terminals or Lead Wire
185VAC to 245VAC for 230V Type
1,500VAC for 1 second
Class A
10M Ohms Min. @500 VDC
-10°C to + 70°C
Thermally Protected
1050g
Yes

DIMENSION

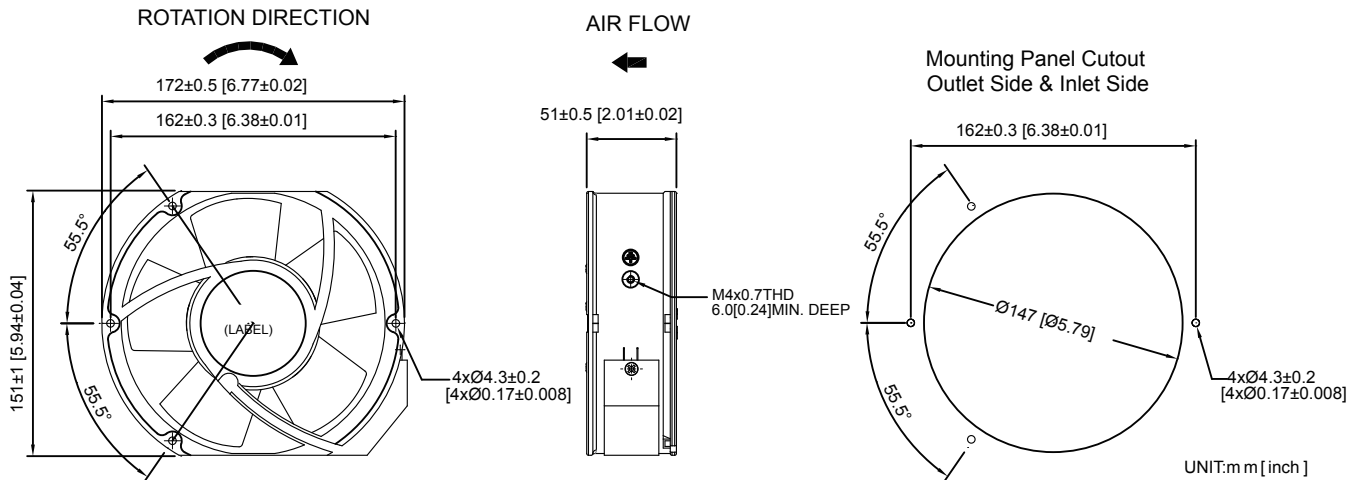

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A17251V1HBL-DA	115	50/60	0.25/0.21	27/25	2700/3100	0.55/0.61 14/15.5	210/250 5.94/7.07	53/59
A17251V2HBL-DA	230	50/60	0.11/0.12	26/27	2700/3100	0.55/0.61 14/15.5	210/250 5.94/7.07	53/59

AIR PERFORMANCE

