

A17251A

172x151x51mm
(6.77"x6"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
MOTOR TYPE	Shaded Pole Motor
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	85VAC to 125VAC for 115V Type 185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH	1,500VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms min. @500 VDC
OPERATING TEMPERATURE	-10°C to +70°C
SAFETY	Thermally Protected
WEIGHT	1050g
ROHS COMPLIANCE	Yes

172mm

172mm

DIMENSION

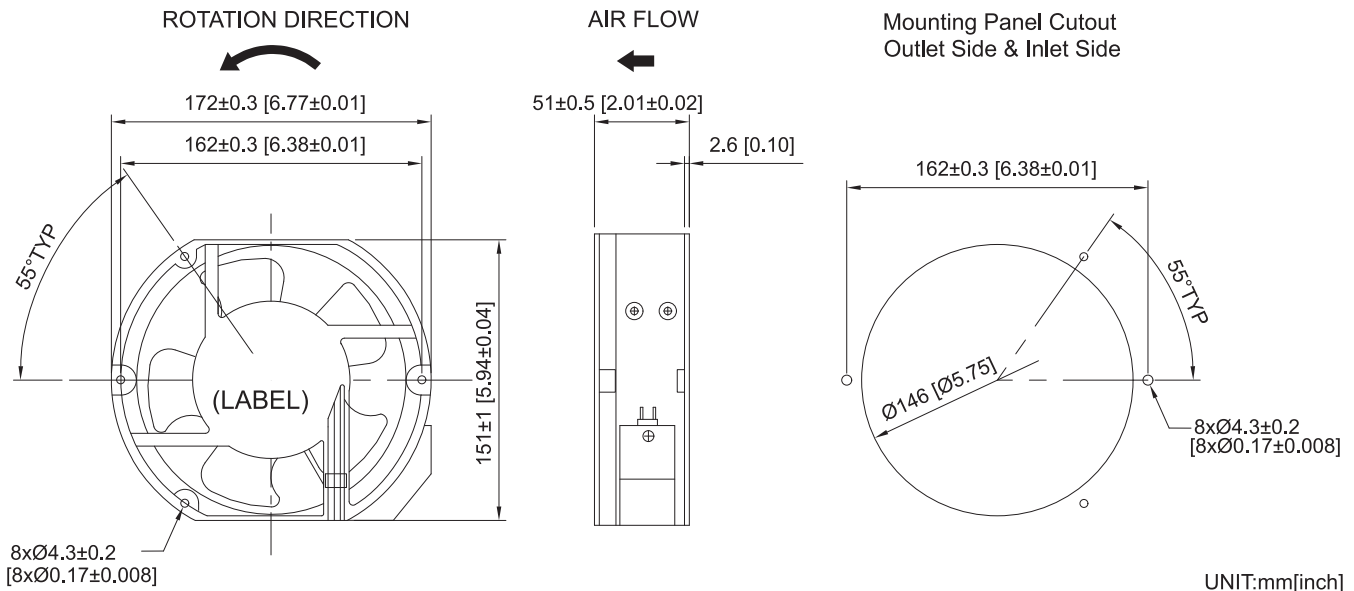

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A17251V1HA	115	50/60	0.62/0.55	50.3/45.1	2600/2850	0.43/0.41 11/10	187/189 5.3/5.3	50
A17251V1MA	115	50/60	0.33/0.33	28.0/27.9	2400/2000	0.51/0.55 13/14	159/148 4.5/4.2	40
A17251V1LA	115	50/60	0.29/0.29	25.9/25.0	2170/1300	0.40/0.31 10/ 8	113/100 3.2/2.9	32
A17251V2HA	230	50/60	0.32/0.27	52.0/46.0	2600/2850	0.43/0.41 11/10	187/189 5.3/5.3	50
A17251V2MA	230	50/60	0.18/0.18	28.8/28.5	2400/2200	0.51/0.55 13/14	159/148 4.5/4.2	40
A17251V2LA	230	50/60	0.14/0.13	23.1/21.3	2170/1300	0.40/0.31 10/ 8	113/100 3.2/2.9	32

AIR PERFORMANCE

