

A 25089

ø 254x89mm
(ø 10"x3.50")



250mm




HOUSING Aluminum Die Casting, Painted Black
IMPELLER Thermoplastic PBT, UL94V-0
BEARING Ball
MOTOR TYPE AC Induction Capacitor Motor
TERMINATION Terminals or Lead Wire
OPERATING VOLTAGE RANGE 85VAC to 125VAC for 115V Type
 185VAC to 245VAC for 230V Type
DIELECTRIC STRENGTH 1,500 VAC for 1 minute
INSULATION Class A
INSULATION RESISTANCE 10M Ohms min. @ 500VDC
OPERATING TEMPERATURE -10°C to +70°C
SAFETY Thermally Protected
WEIGHT 1.6kg
ROHS COMPLIANCE Yes

250mm

AC Fans & Blowers

DIMENSION

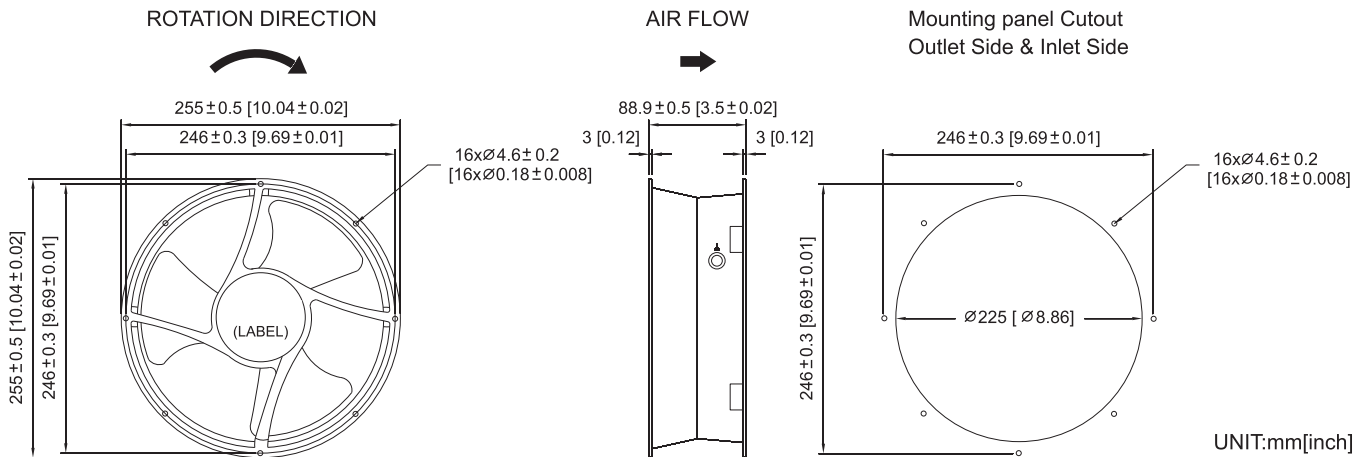

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A25089V1MB	115	50/60	0.35/0.36	38/40	1400/1650	0.27/0.34	6.90/8.62	443/525	12.5/14.9	49/53
A25089V2MB	230	50/60	0.19/0.18	39/40	1450/1700	0.28/0.34	7.17/8.74	445/529	12.6/15.0	49/53

AIR PERFORMANCE

