

A

8025

80x80x25mm
(3.15"xX3.15"x1")



- HOUSING

IMPELLER

BEARING

MOTOR TYPE

TERMINATION

OPERATING VOLTAGE RANGE
- Aluminum Die Casting, Painted Black
Thermoplastic PBT, UL94V-0
Ball or Sleeve
Shaded Pole Motor
Terminals or Lead Wire
85 VAC to 125 VAC for 115 V Type
185 VAC to 245 VAC for 230 V Type
1,500VAC for 1 minute
Class A
10M Ohms min. @ 500 VDC
-10°C to +70°C
Impedance Protected
223g
Yes

DIELECTRIC STRENGTH

INSULATION

INSULATION RESISTANCE

OPERATING TEMPERATURE

SAFETY


WEIGHT

ROHS COMPLIANCE

80mm

AC Fans & Blowers

DIMENSION

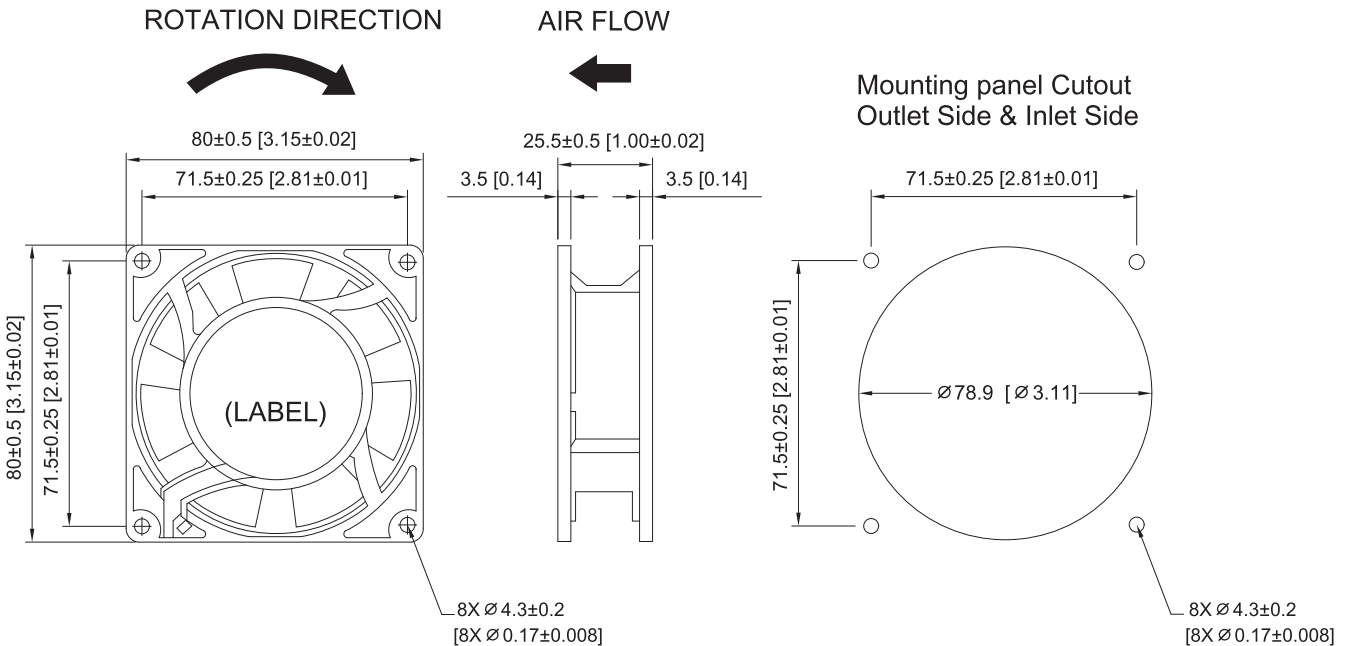

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A8025V1H	115	50/60	0.07/0.06	6/5	2700/3100	0.10/0.13	2.54/3.30	18/22	0.5/0.6	25/32
A8025V2H	230	50/60	0.05/0.04	9/7	2700/3100	0.10/0.13	2.54/3.30	18/22	0.5/0.6	25/32

AIR PERFORMANCE

