

A

9225-S

92x92x25mm
(3.62"x3.62"x1")



- HOUSING

IMPELLER

BEARING

MOTOR TYPE

TERMINATION

OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH

INSULATION

INSULATION RESISTANCE

OPERATING TEMPERATURE

SAFETY

WEIGHT

ROHS COMPLIANCE


ADDITIONAL FUNCTION
- Aluminum Die Casting, Painted Black
Thermoplastic PBT, UL94V-0
Ball or Sleeve
Shaded Pole Motor
Terminals or Lead Wire
85 VAC to 125 VAC for 115 V Tpye
185 VAC to 245 VAC for 230 V Tpye
1,500 VAC for 1 minute
Class A
10M Ohms min. @ 500 VDC
-10°C to + 70°C
Impedance Protected
290g.
YES
FG , RD

92mm

92mm

AC Fans & Blowers

DIMENSION

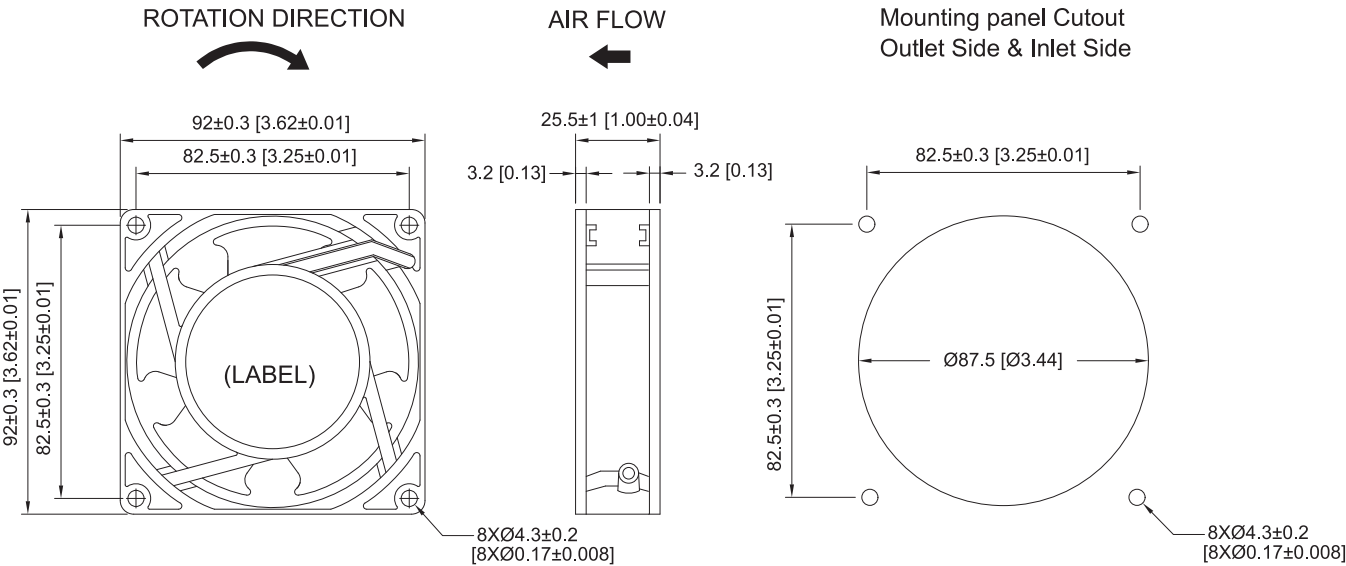

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A9225V1H-S	115	50/60	0.18/0.16	18/15	2500/3000	0.11/0.13	2.80/3.50	24/28	0.68/0.79	30
A9225V1M-S	115	50/60	0.08/0.07	8.3/7.9	2100/2300	0.08/0.08	2.23/2.22	21/22	0.60/0.62	22
A9225V1L-S	115	50/60	0.06/0.05	6.0/5.9	1700/1750	0.06/0.06	1.75/1.61	17/16	0.50/0.47	19
A9225V2H-S	230	50/60	0.09/0.08	15/13	2500/3000	0.11/0.13	2.80/3.50	24/28	0.68/0.79	30
A9225V2M-S	230	50/60	0.04/0.03	7.5/7.0	2100/2300	0.08/0.08	2.23/2.22	21/22	0.60/0.62	22
A9225V2L-S	230	50/60	0.03/0.03	6.8/6.0	1650/1850	0.06/0.06	1.75/1.61	17/16	0.50/0.47	19

AIR PERFORMANCE

