

A9238

92x92x38mm
(3.62"x3.62"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
MOTOR TYPE	Shaded Pole Motor
TERMINATION	Terminals or Lead Wire
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 120 V Type
	185 VAC to 245 VAC for 230 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10M Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-10°C to +70°C
SAFETY	Impedance Protected
WEIGHT	446g
ROHS COMPLIANCE	Yes

92mm

92mm

DIMENSION

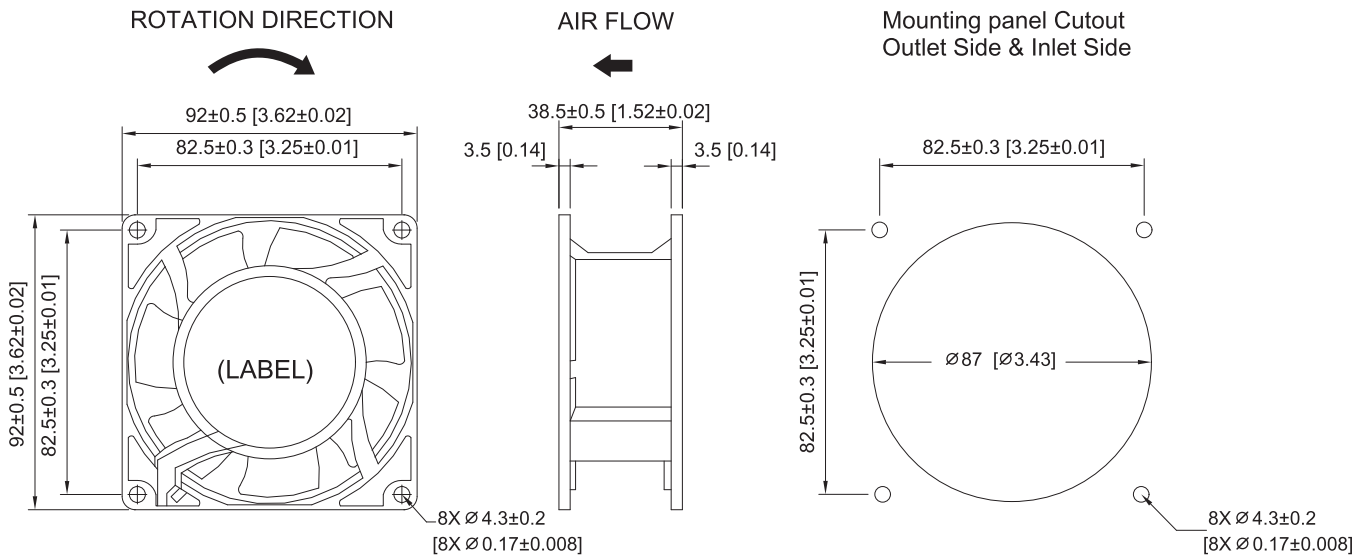

SPECIFICATION

UNIT:mm[inch]

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A9238V1H	115	50/60	0.19/0.15	14/11	2750/3250	0.19/0.24 4.83/6.10	42/49 1.2/1.4	40/45
A9238V2H	230	50/60	0.10/0.08	15/12	2750/3250	0.19/0.24 4.83/6.10	42/49 1.2/1.4	40/45

AIR PERFORMANCE

