

# A9238M

92x92x38mm  
(3.62"x3.62"x1.5")



HOUSING  
IMPELLER  
BEARING  
MOTOR TYPE  
TERMINATION  
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH  
INSULATION  
INSULATION RESISTANCE  
OPERATING TEMPERATURE  
SAFETY  
WEIGHT  
ROHS COMPLIANCE


Aluminum Die Casting, Panted Black  
Metal  
Ball or Sleeve  
Outer Rotor, Shaded Pole Motor  
Lead Wire  
85VAC to 125VAC for 115V Type  
185VAC to 245VAC for 230V Type  
1,500 VAC for 1 minute  
Class A  
10M hms min. @ 500 VDC  
-10°C to + 70°C  
Impedance Protected  
420g  
Yes

92mm

92mm

AC Fans & Blowers

## DIMENSION

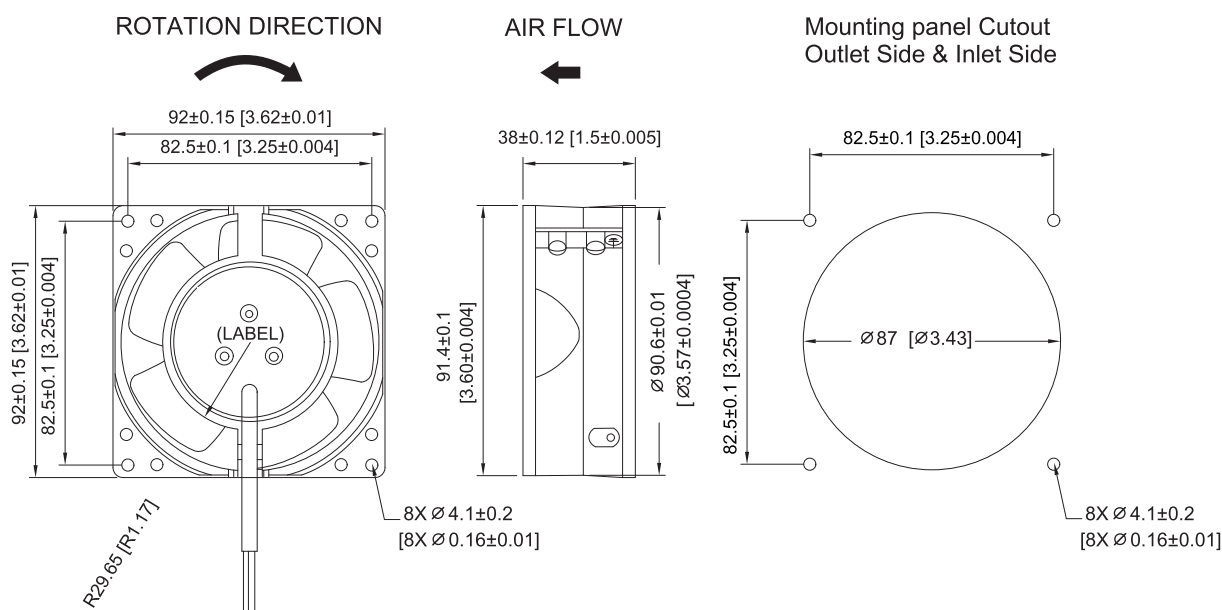

## SPECIFICATION

UNIT:mm[inch]

| MODEL NO. | RATED VOLTAGE (V) | FREQUENCY (Hz) | RATED CURRENT (A) | INPUT POWER (W) | SPEED (RPM) | MAX. AIR PRESSURE<br>inchH <sub>2</sub> O   mmH <sub>2</sub> O | MAX. AIR FLOW<br>CFM   m <sup>3</sup> /min | NOISE<br>dB(A) @1M |
|-----------|-------------------|----------------|-------------------|-----------------|-------------|----------------------------------------------------------------|--------------------------------------------|--------------------|
| A9238V1HM | 115               | 50/60          | 0.25/0.24         | 16/14           | 2600/3000   | 0.21/0.27   5.4/6.9                                            | 47/55   1.33/1.56                          | 38/43              |
| A9238V2HM | 230               | 50/60          | 0.22/0.20         | 16/14           | 2600/3000   | 0.21/0.27   5.4/6.9                                            | 47/55   1.33/1.56                          | 38/43              |

## AIR PERFORMANCE

