

DCF13391



Ø133x91mm
(Ø5.23"x3.58")




MOTOR
IMPELLER
BEARING
TERMINATION
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Outer rotor motor Ø72mm
Plastic Impeller, Metal Plate
Ball
Lead Wire
0 °C ~ + 65 °C
10M Ohms Min. @500VDC
5mA Max.at 1500 VAC for 1 minute
740g
YES

133 mm

DIMENSION

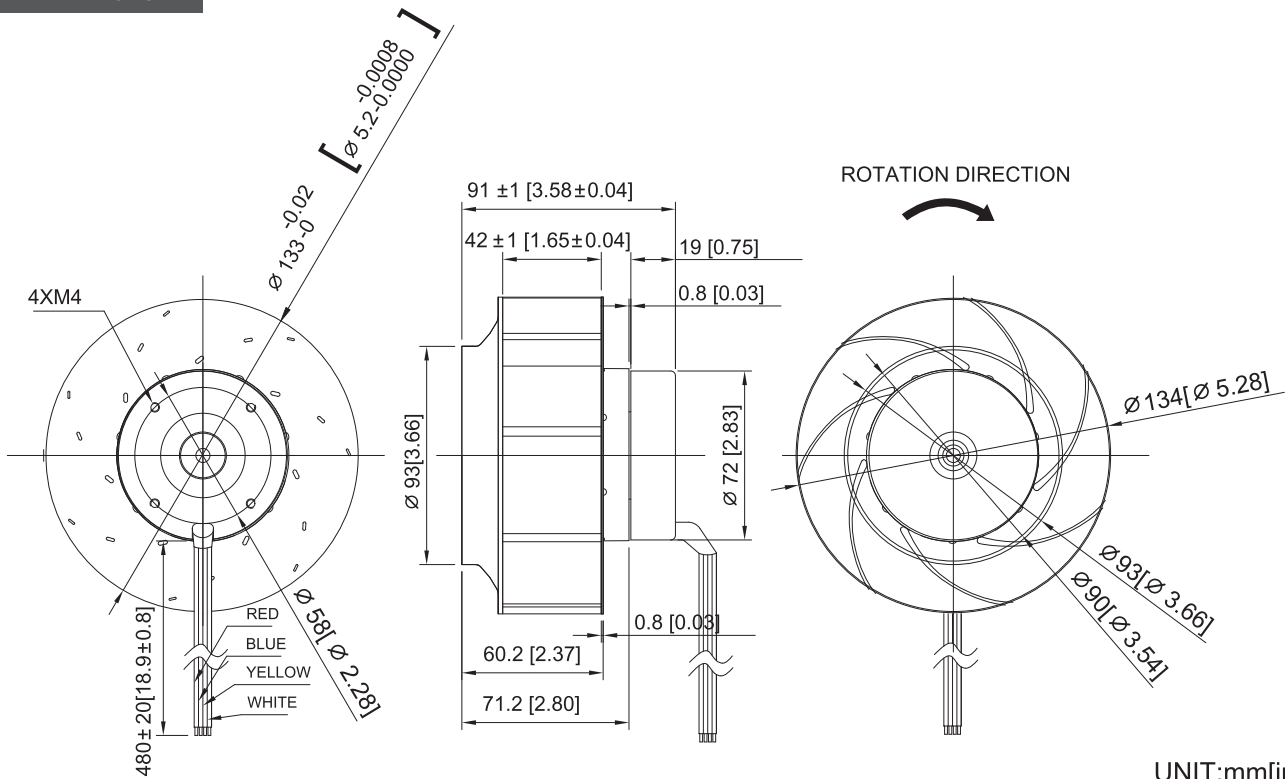

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT (A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A)@1M
DCF13391V24H	24	1.6	38.4	4000	1.45 36.8	212.2 6.01	65
DCF13391V48SH	48	1.3	62.4	4500	1.63 41.5	247.5 7.00	70
DCF13391V48H	48	0.8	38.4	4000	1.45 36.8	212.2 6.01	65

AIR PERFORMANCE

