

DCF 17568-PB


Ø175X68mm
(Ø6.89"X2.68")



MOTOR
IMPELLER
BEARING
TERMINATION
OPERATING VOLTAGE RANGE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Outer roter motor Ø72mm
Plastic Impeller
Ball
Lead Wire
0°C to + 65°C
10M Ohms Min. @500VDC
5mA Max. at 1500 VAC for 1 minute
780g
Yes

DIMENSION

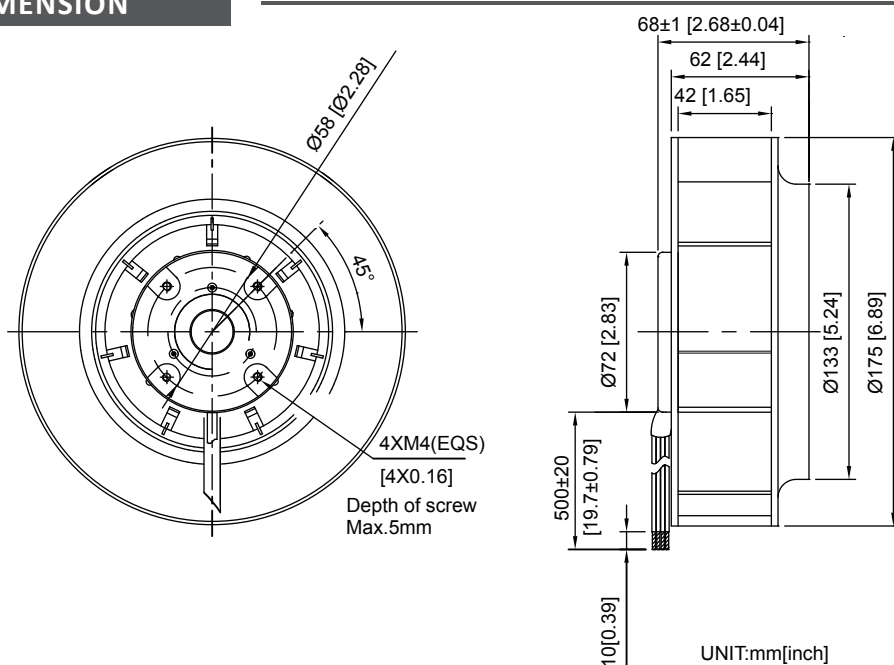

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DCF17568V24SH-PB	24	3.5	75	3900	2.56	65.02	409	11.57	72
DCF17568V24H-PB	24	1.4	34	3100	1.58	40.13	333	9.42	65
DCF17568V48SH-PB	48	1.8	75	3900	2.56	65.02	409	11.57	72
DCF17568V48H-PB	48	0.7	34	3100	1.58	40.13	333	9.42	65

AIR PERFORMANCE

