

DCF 22071-PB


Ø220X71mm
(Ø8.64"X2.79")



MOTOR
IMPELLER
BEARING
TERMINATION
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Outer roter motor Ø92mm
Metal
Ball
Lead Wire
0°C to + 65°C
10M Ohms Min. @500VDC
5mA Max. at 1500 VAC for 1 second
1350g
Yes

DIMENSION

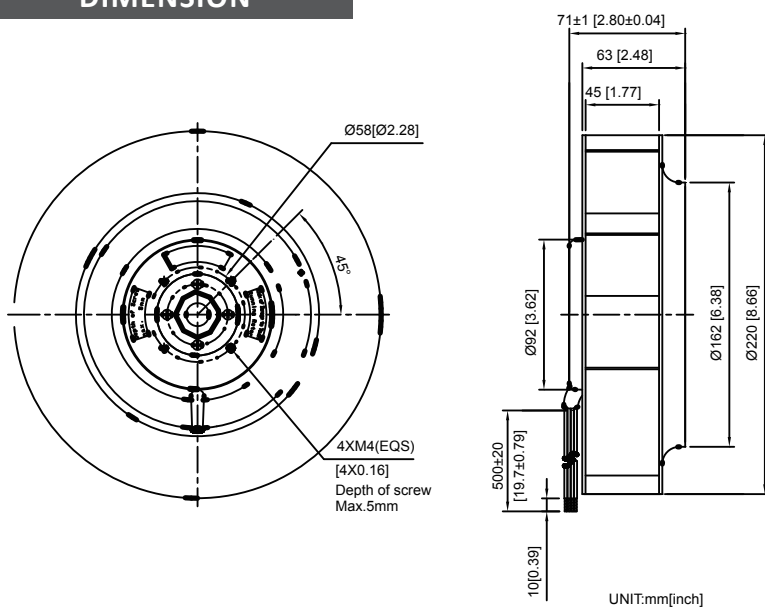

Wiring Diagram

Red — +VDC
Blue — GND
Yellow — 0-10V/PWM Speed Control
White — Tachometer (FG)

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DCF22070V24H-PB	24	4.42	106	3150	2.81	71.37	621	17.57	76
DCF22071V48H-PB	48	2.08	100	3100	2.81	71.37	597	16.89	76

AIR PERFORMANCE

