

ECF 250130



Ø 250x130mm
(Ø 9.84"x5.12")




MOTOR
IMPELLER
BEARING
INSULATION
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Outer rotor motor Ø92mm
Metal
Ball
Class A
-20 °C to +60 °C
10M Ohms Min. @500VDC
5mA Max.at 500 VAC for 1 minute
2.1 kg
YES

DIMENSION

250mm

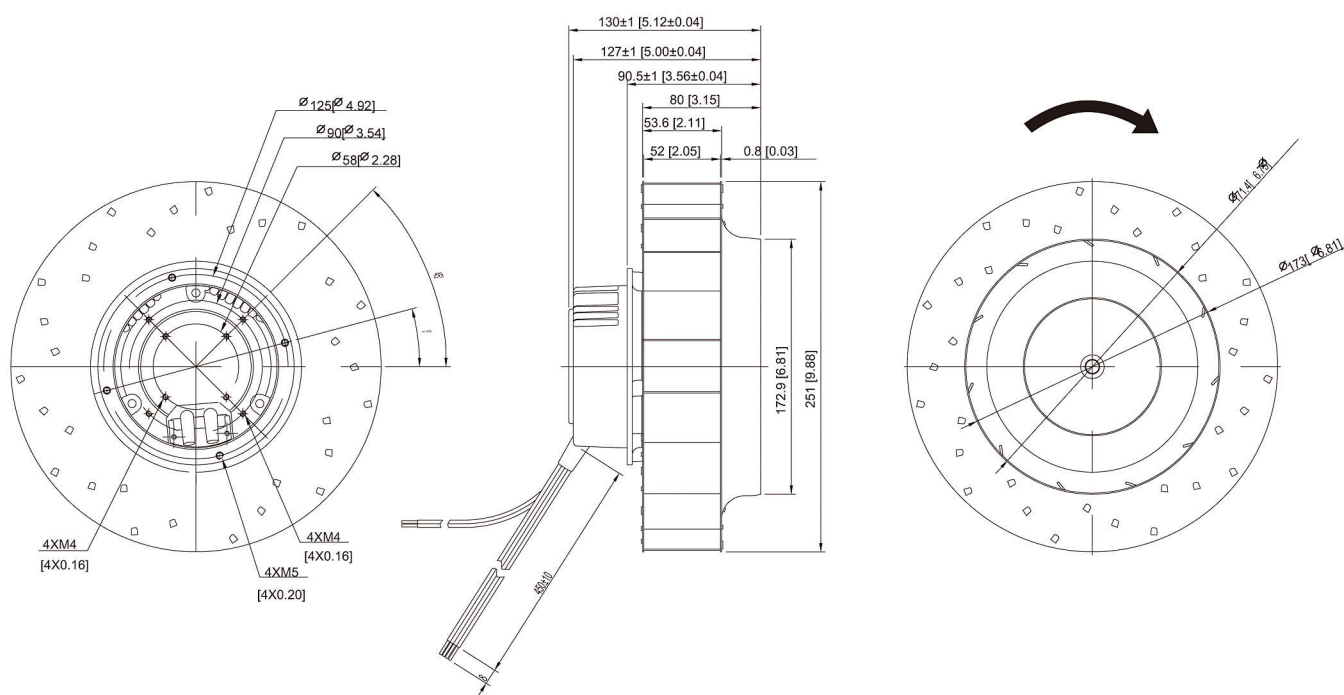

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A)@1M
ECF250130V2HB	230	50	1.0	145	2600	2.36 59.9	772 21.86	70

AIR PERFORMANCE

