


D12025F-K

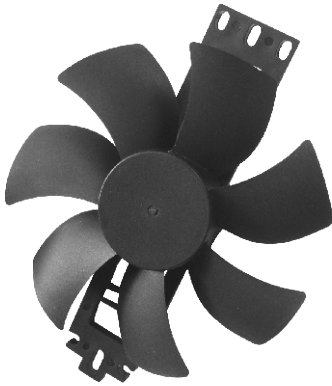


IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min.@500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	83g
ROHS COMPLIANCE	YES
ADDITIONAL FUNCTION	FG

120mm

120mm

DIMENSION

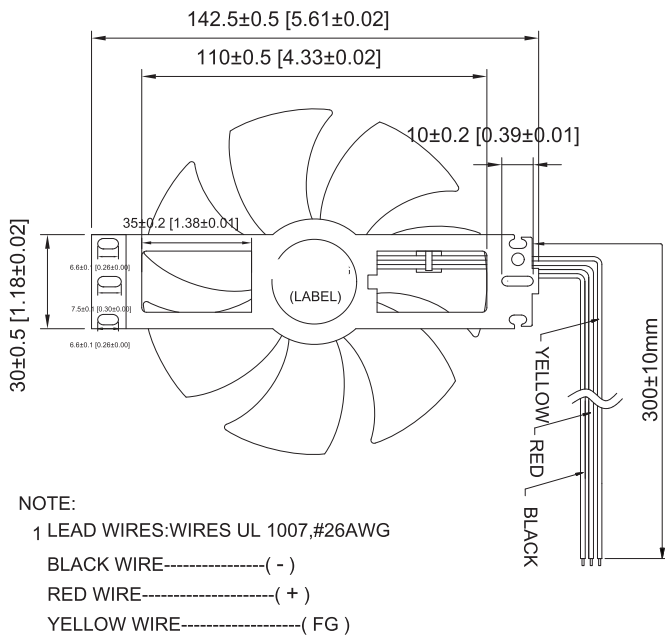

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D12025V24MSF-K-FG	24	0.21	5.04	2200	0.18	4.60	80.6	2.28	27

AIR PERFORMANCE

