


D6038D-A



60x60x38mm
(2.36"x2.36"x1.49")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min.@500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	109g
ROHS COMPLIANCE	Yes

60 mm
60mm

DC Fans & Blowers

DIMENSION

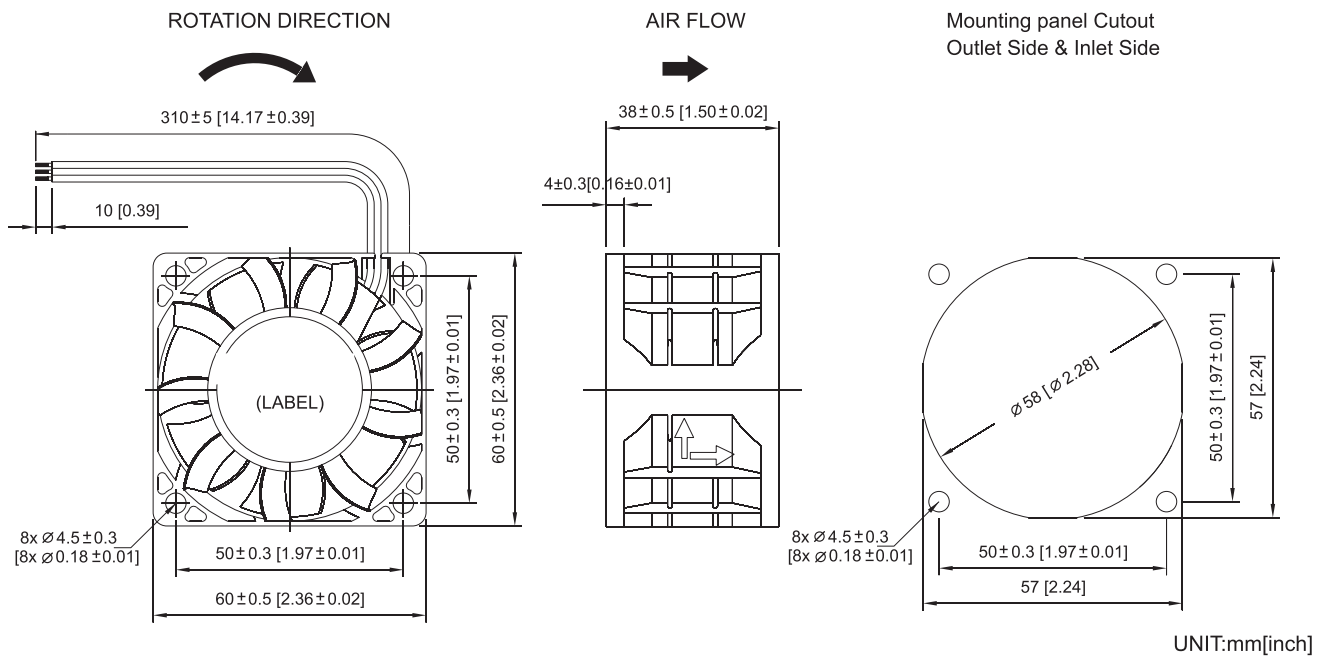

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m ³ /min	
D6038V12SLBD-A	12	1.40	16.80	10000	1.20	30.48	61	1.73	63.6
D6038V12HBD-A	12	0.64	7.68	8000	0.98	24.99	48	1.36	58.0
D6038V12MBD-A	12	0.28	3.36	6000	0.56	14.29	36	1.02	49.8
D6038V24SLBD-A	24	0.70	16.80	10000	1.20	30.48	61	1.73	63.6
D6038V24HBD-A	24	0.34	8.16	8000	0.98	24.99	48	1.36	58.0
D6038V24MBD-A	24	0.16	3.84	6000	0.56	14.27	36	1.02	49.8
D6038V48SLBD-A	48	0.38	18.24	10000	1.20	30.48	61	1.73	63.6
D6038V48HBD-A	48	0.20	9.60	8000	0.98	24.99	48	1.36	58.0
D6038V48MBD-A	48	0.09	4.32	6000	0.56	14.27	36	1.02	49.8

AIR PERFORMANCE

