

MB2012 SERIES ~

Multilayer Chip Suppressions / Chip Beads




RoHS Compliant

PART NUMBERING SYSTEM

MB	2012	—	601	—	LF
TYPE	DIMENSIONS		IMPEDANCE		LEAD FREE

SHAPES AND DIMENSIONS

UNIT : mm

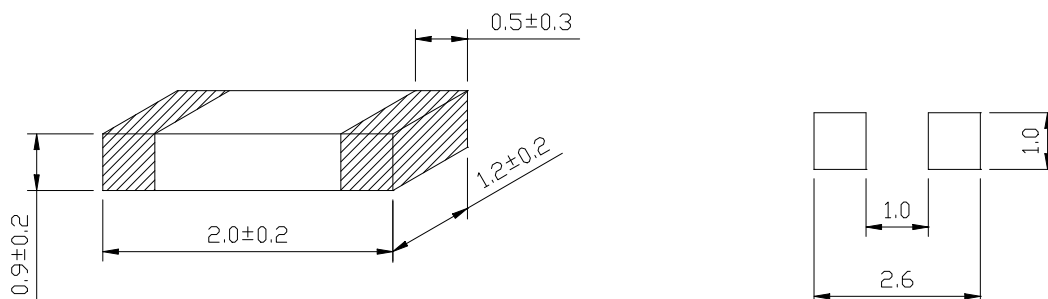

SPECIFICATION TABLE

PART NUMBER	IMPEDANCE (Ω) at 100MHz	DCR (Ω) (max)	IDC (mA) (max)
MB2012-110-LF	11±25%	0.10	300
MB2012-310-LF	31±25%	0.10	300
MB2012-600-LF	60±25%	0.15	300
MB2012-800-LF	80±25%	0.15	300
MB2012-101-LF	100±25%	0.20	300
MB2012-121-LF	120±25%	0.20	300
MB2012-151-LF	150±25%	0.20	300
MB2012-221-LF	220±25%	0.25	300
MB2012-301-LF	300±25%	0.25	300
MB2012-401-LF	400±25%	0.30	300
MB2012-601-LF	600±25%	0.35	300
MB2012-102-LF	1000±25%	0.45	300
MB2012-152-LF	1500±25%	0.70	300
MB2012-202-LF	2000±25%	0.40	200
MB2012-222-LF	2200±25%	0.50	200
MB2012-252-LF	2500±25%	0.60	200
MB2012-272-LF	2700±25%	0.60	200


- Test equipment : Agilent/HP-4291A impedance analyzer or equipment .
- Operating temperature range -55°C to +125°C , Electrical specifications at 25°C..

MB2012 SERIES ~


Multilayer Chip Suppressions / Chip Beads

IMPEDANCE vs FREQUENCY


MB2012-101-LF

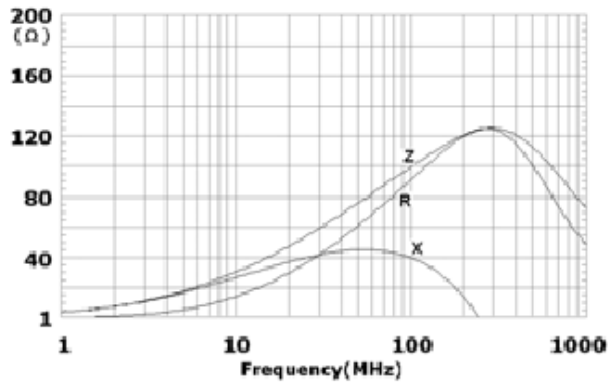


MB2012-121-LF

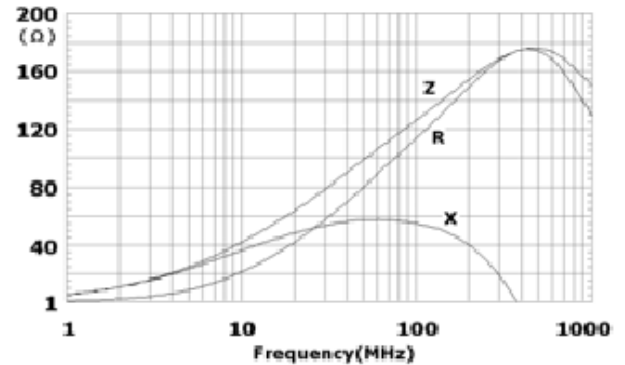


MB2012-310-LF

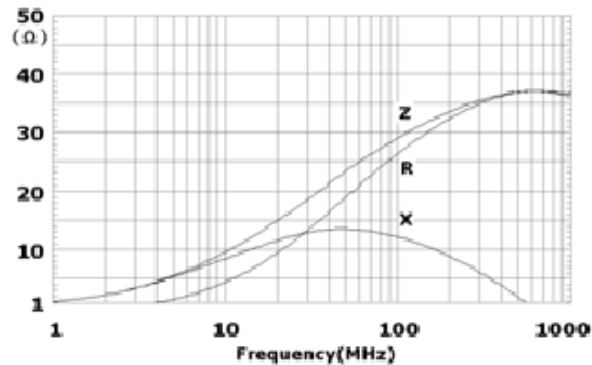


MB2012-520-LF

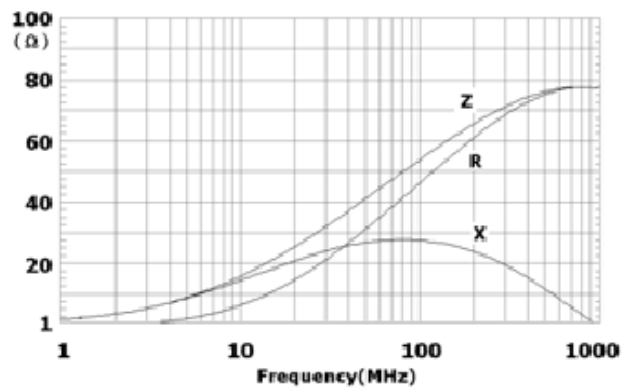

MB2012-600-LF

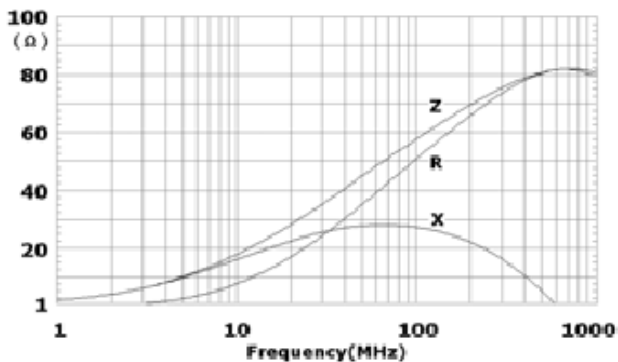

MB2012-800-LF

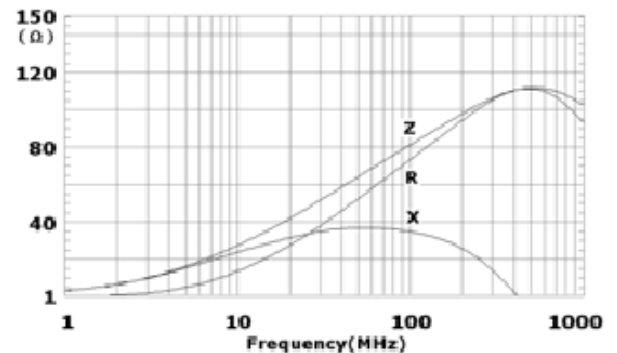


MB2012 SERIES ~

Multilayer Chip Suppressions / Chip Beads


PACKAGING SPECIFICATION



RoHS Compliant

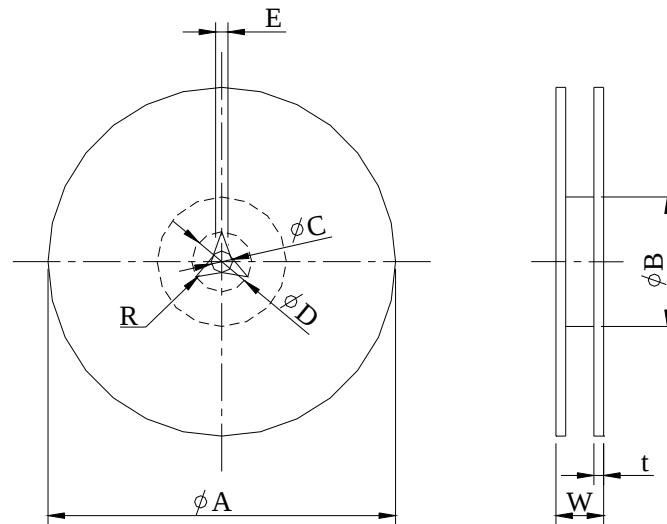

	A	B	C	D	E	W8	W12	t	R
T(ϕ 178mm) Reel	ϕ 178 $\pm$ 2	ϕ 60 $\pm$ 1	ϕ 13 $\pm$ 0.8	ϕ 21 $\pm$ 0.8	2	10 $\pm$ 1.5	14.5 $\pm$ 1.5	1.27 $\pm$ 0.2	1

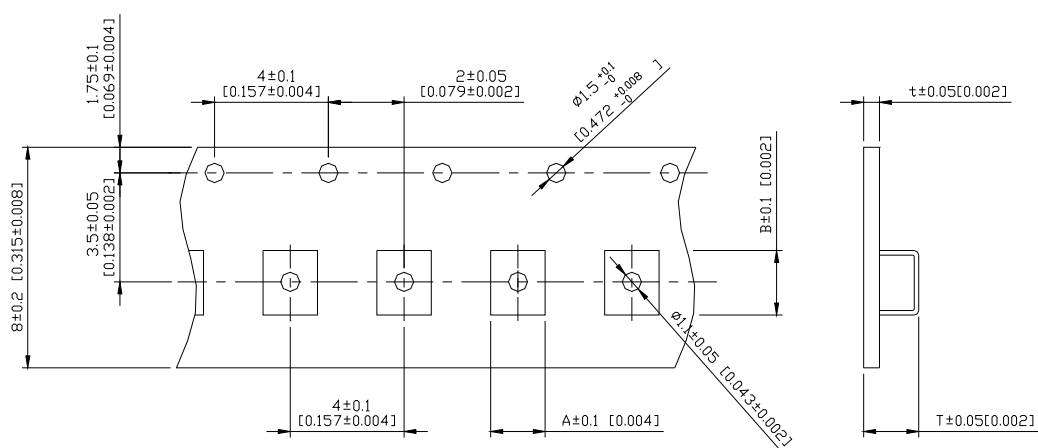

TYPE	A	B	T	t	T(ϕ 178mm)	T(ϕ 330mm)
MB2012	1.55	2.30	1.20	0.2	4000 pcs/reel	-