

## Common Mode Choke ~ CMT1409B SERIES




RoHS Compliant

### PART NUMBERING SYSTEM


<b>CMT</b>	<b>1409B</b>	—	<b>102N</b>	—	<b>LF</b>
TYPE	DIMENSIONS		IMPEDANCE		LEAD FREE

### SHAPES AND DIMENSIONS

UNIT : mm

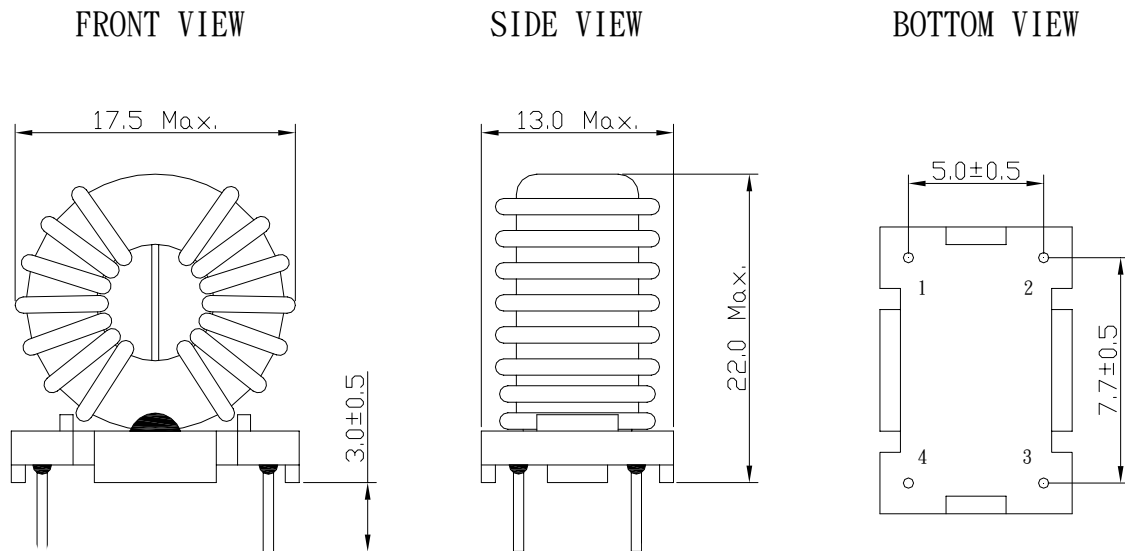

### SCHEMATIC DRAWING

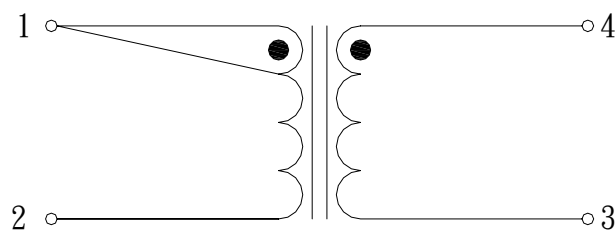

## Common Mode Choke ~ CMT1409B SERIES



RoHS Compliant

### SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (mH)	DCR (mΩ) (max)	IDC ( A ) (max)	NOMINAL VOLTAGE V <sub>AC</sub>	TEST FREQ. ( f )
CMT1409B-102N-LF	1.0±30%	35	3.0	250	10KHz
CMT1409B-402N-LF	2.2±30%	70	2.0	250	10KHz
CMT1409B-502N-LF	3.3±30%	120	1.5	250	10KHz
CMT1409B-103N-LF	10.0±30%	360	1.0	250	10KHz
CMT1409B-203N-LF	20.0±30%	540	0.5	250	10KHz

- Inductance is measured with a LCR meter 4284A or equivalent.
- Test voltage : 1500V, 50Hz , 5mA , 2sec.
- Operating temperature range -40°C to +125°C
- Electrical specifications at 25°C