

SEP0503EB SERIES

High Current SMD Power Inductors



RoHS Compliant

PART NUMBERING SYSTEM


<u>SEP</u>	<u>0503EB</u>	—	<u>3R3M</u>	—	<u>LF</u>
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

FEATURES :

- Low profile (3.0mm max. height) and 5.75 mm max. square.
- Magnetically shielded and low DC resistance and Suitable for large current .
- Excellent temperature stability for inductance and saturation .
- Frequency range up to 5MHZ .
- Large current handling capability .

SHAPES AND DIMENSIONS :


UNIT : mm

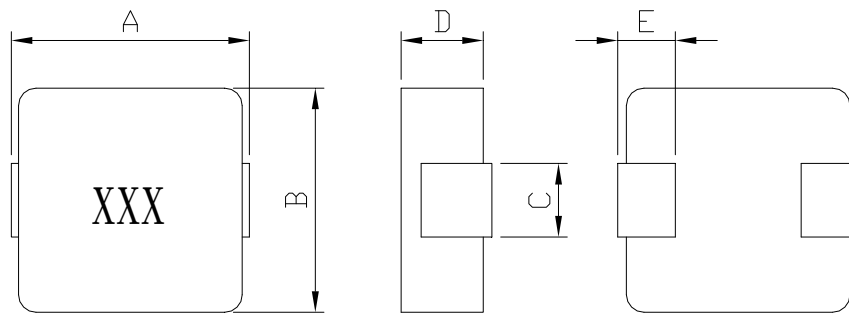

A=5.75 Max. B=5.45 Max. C=2.5±0.3 D=3.0 Max. E=1.0±0.3

RECOMMENDED PATTERNS

UNIT : mm

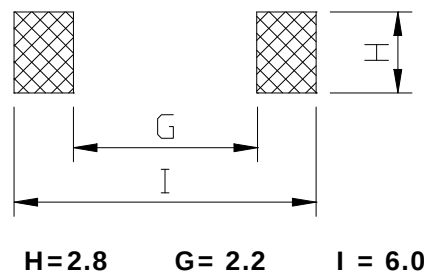

H=2.8 G= 2.2 I = 6.0

SEP0503EB SERIES

High Current SMD Power Inductors



RoHS Compliant

SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	Isat (A) (Typ.)	Irms (A) (Typ.)	DCR (m Ω) (Typ.)	DCR (m Ω) (Max.)
SEP0503EB-R10M-LF	0.10 $\pm$ 20%	27.0	23.0	3.00	3.16
SEP0503EB-R22M-LF	0.22 $\pm$ 20%	21.0	15.5	4.30	4.52
SEP0503EB-R33M-LF	0.33 $\pm$ 20%	19.0	13.7	5.70	5.56
SEP0503EB-R47M-LF	0.47 $\pm$ 20%	15.0	12.2	6.70	7.04
SEP0503EB-R68M-LF	0.68 $\pm$ 20%	13.5	10.2	8.53	8.96
SEP0503EB-R82M-LF	0.82 $\pm$ 20%	13.0	9.30	11.3	11.9
SEP0503EB-1R0M-LF	1.0 $\pm$ 20%	12.0	9.20	13.1	13.7
SEP0503EB-1R5M-LF	1.5 $\pm$ 20%	11.0	7.20	19.7	20.7
SEP0503EB-2R2M-LF	2.2 $\pm$ 20%	10.0	5.80	27.8	29.2
SEP0503EB-3R3M-LF	3.3 $\pm$ 20%	8.50	5.00	52.1	54.7
SEP0503EB-4R7M-LF	4.7 $\pm$ 20%	8.20	3.50	73.8	77.5
SEP0503EB-5R6M-LF	6.8 $\pm$ 20%	4.10	3.00	103	108
SEP0503EB-100M-LF	10 $\pm$ 20%	4.00	2.50	152	158
SEP0503EB-150M-LF	15 $\pm$ 20%	2.50	1.90	252	265

- I sat : DC current at which the inductance drops 20% (typ) from its value without current.
- I rms : Average current for a 40°C temperature rise above 25°C ambient.
- Test Frequency at 100KHz / 0.1V
- Operating temperature range -55°C to +125°C , Electrical specifications at 25°C .
- Reel Qty 2,000pcs