

SDC4D28 SERIES

SMD Shielded Power Inductors




RoHS Compliant

PART NUMBERING SYSTEM


<u>SDC</u>	<u>4D28</u>	—	<u>1R2N</u>	—	<u>LF</u>
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS

UNIT : mm

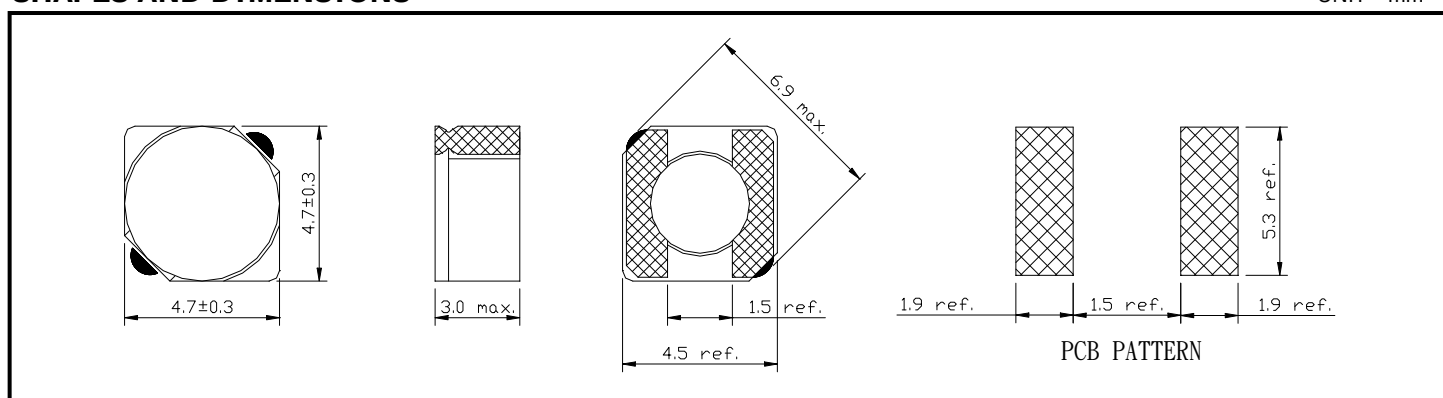

PACKAGING SPECIFICATION

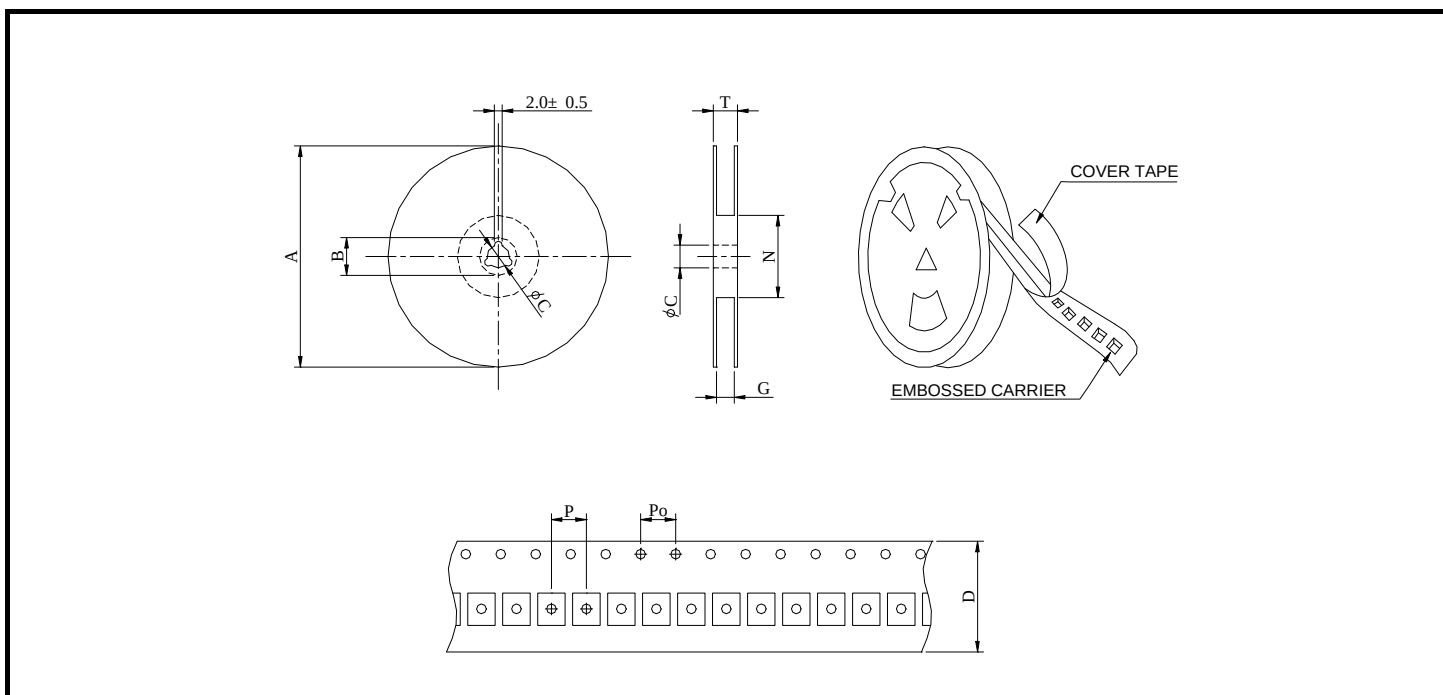

SERIES	STAYLE	Q' TY (PCS)	DIMENSIONS (m/m)								
			A	B±0.8	C±0.5	D	G ⁺⁰	N ⁻⁰	P	Po	T
SDC4D28	13-16	2000	330	21	13	16	18	50	8	4	22.4

SDC4D28 SERIES

SMD Shielded Power Inductors



RoHS Compliant

SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	DCR (m Ω) (Max.)	IDC	(A)	TEST FREQ. (f)
SDC4D28-1R2N-LF	1.2 $\pm$ 30%	23.6	2.56		100KHz
SDC4D28-1R8N-LF	1.8 $\pm$ 30%	27.5	2.20		100KHz
SDC4D28-2R2N-LF	2.2 $\pm$ 30%	31.3	2.04		100KHz
SDC4D28-2R7N-LF	2.7 $\pm$ 30%	43.3	1.60		100KHz
SDC4D28-3R3N-LF	3.3 $\pm$ 30%	49.2	1.57		100KHz
SDC4D28-3R9N-LF	3.9 $\pm$ 30%	64.8	1.44		100KHz
SDC4D28-4R7N-LF	4.7 $\pm$ 30%	72.0	1.32		100KHz
SDC4D28-5R6N-LF	5.6 $\pm$ 30%	100.9	1.17		100KHz
SDC4D28-6R8N-LF	6.8 $\pm$ 30%	108.9	1.12		100KHz
SDC4D28-8R2N-LF	8.2 $\pm$ 30%	117.5	1.04		100KHz
SDC4D28-100N-LF	10 $\pm$ 30%	128.3	1.00		100KHz
SDC4D28-120N-LF	12 $\pm$ 30%	131.6	0.84		100KHz
SDC4D28-150N-LF	15 $\pm$ 30%	149.0	0.76		100KHz
SDC4D28-180N-LF	18 $\pm$ 30%	166.0	0.72		100KHz
SDC4D28-220M-LF	22 $\pm$ 20%	235.0	0.70		100KHz
SDC4D28-270M-LF	27 $\pm$ 20%	261.0	0.58		100KHz
SDC4D28-330M-LF	33 $\pm$ 20%	331.3	0.56		100KHz
SDC4D28-390M-LF	39 $\pm$ 20%	383.7	0.50		100KHz
SDC4D28-470M-LF	47 $\pm$ 20%	587.0	0.48		100KHz
SDC4D28-560M-LF	56 $\pm$ 20%	624.5	0.41		100KHz
SDC4D28-680M-LF	68 $\pm$ 20%	699.0	0.35		100KHz
SDC4D28-820M-LF	82 $\pm$ 20%	914.8	0.32		100KHz
SDC4D28-101M-LF	100 $\pm$ 20%	1020.0	0.29		100KHz
SDC4D28-121M-LF	120 $\pm$ 20%	1270.0	0.27		100KHz
SDC4D28-151M-LF	150 $\pm$ 20%	1350.0	0.24		100KHz
SDC4D28-181M-LF	180 $\pm$ 20%	1540.0	0.22		100KHz

- Isat : DC current at which the inductance drops 35% (typ) from its value without current.
- Irms: The actual current when temperature of coil becomes $\Delta 40^{\circ}\text{C}$. (Ta= +25 $^{\circ}\text{C}$)
- Operating temperature range -40 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$, Electrical specifications at 25 $^{\circ}\text{C}$.
- Packing : 13" reel, machine-ready ,embossed plastic tape (2,000 parts per full reel).