

## EPU16A series

### 15W Desktop type switching power supplies



The EPU16A series of AC/DC switching mode power supplies provide 15 Watts of continuous output power and is well-suited for a variety of applications. All supplies are UL 94V-1 min compliant. All model meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL(UL 60950-1:2nd Edition), TUV/GS(EN 60950-1:2nd Edition) and new CE requirements. All units are 100% burned-in and tested.



#### Features


- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Energy Star 2.0, Efficiency level V
- Single Output
- Class I
- 1 year warranty

#### Electrical characteristics

- Efficiency: 72~85%
- Line Regulation: 1% max.
- Load Regulation: 7% max.
- Hold-up Time: 8mS min.
- Output ripple and noise: 2% (max.).

#### Environmental

- Operating Temperature: 0 to 70°C
- Derate linearly from 100% load at 40°C to 50% load at 70°C
- Storage Temperature: -40~85°C
- Operating Humidity : 0~95%
- Storage Humidity: 0~95%
- MTBF: 100,000 calculated hours

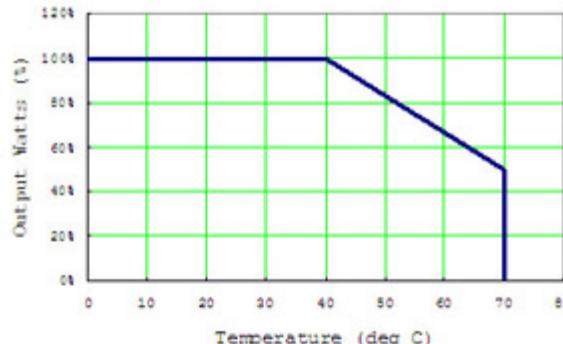

| Model No.   | Output Voltage | Max. Output Current | Total Regulation | Max. Output Power | Certificate                                 |
|-------------|----------------|---------------------|------------------|-------------------|---|
| ►EPU16A-101 | 3~5VDC         | 2.5A max            | 7%               | 12W               | UL, CB, CE, FCC, TUV-GS, RoHS               |
| ►EPU16A-102 | 5~6VDC         | 2.50~2.00A          | 5%               | 12W               | UL, CB, CE, FCC, TUV-GS, RoHS               |
| ►EPU16A-103 | 6~8VDC         | 2.00~1.50A          | 5%               | 12W               | UL, CB, CE, FCC, TUV-GS, RoHS               |
| ►EPU16A-104 | 8~11VDC        | 1.87~1.36A          | 5%               | 15W               | UL, CB, CE, FCC, TUV-GS, NRCan, CEC-V, RoHS |
| ►EPU16A-105 | 11~13VDC       | 1.36~1.15A          | 5%               | 15W               | UL, CB, CE, FCC, TUV-GS, NRCan, CEC-V, RoHS |
| ►EPU16A-106 | 13~16VDC       | 1.15~0.94A          | 5%               | 15W               | UL, CB, CE, FCC, TUV-GS, CEC-V, RoHS        |
| ►EPU16A-107 | 16~21VDC       | 0.94~0.72A          | 5%               | 15W               | UL, CB, CE, FCC, TUV-GS, CEC-V, RoHS        |
| ►EPU16A-108 | 21~27VDC       | 0.72~0.55A          | 5%               | 15W               | UL, CB, CE, FCC, TUV-GS, NRCan, CEC-V, RoHS |
| ►EPU16A-109 | 27~33VDC       | 0.55~0.45A          | 4%               | 15W               | UL, CB, CE, FCC, TUV-GS, CEC-V, RoHS        |
| ►EPU16A-110 | 33~40VDC       | 0.45~0.37A          | 4%               | 15W               | UL, CB, CE, FCC, TUV-GS, CEC-V, RoHS        |
| ►EPU16A-111 | 40~48VDC       | 0.37~0.31A          | 4%               | 15W               | UL, CB, CE, FCC, TUV-GS, CEC-V, RoHS        |