

SBU60 series

63W Open frame type switching power supplies for I.T.E.

The SBU60 series of compact, open frame constructed, AC/DC switching mode power supplies provide 63 Watts of continuous output power. They are suited for use in based systems, portable equipments and many other applications. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL(UL 60950-1:2nd Edition), Intertek-GS(EN 60950-1:2nd Edition) and new CE requirements. All units are 100% burned in and tested.



Features


- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal
- Output connector mates with Molex housing 09-50-3061(or 09-50-3081) and Molex 2478 series crimp terminal
- Single to Quad Output
- Size: 3"x5"x1.09"
- Class I
- 2 year warranty

Electrical characteristics

- Efficiency: 80% typ.
- Line Regulation: 1% max.
- Load Regulation: 7% max.
- Hold-up Time: 12mS min.
- Output ripple and noise: 1% (max.).
- (The Ripple & Noise which is under 3.3VDC at 2% max)

Environmental

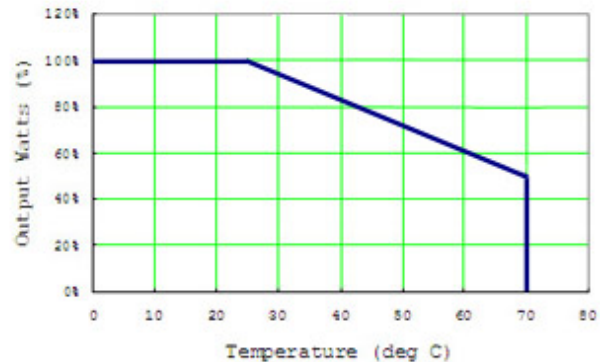

- Operating Temperature: 0 to 70°C
- Derate linearly from 100% load at 25°C to 50% load at 70°C
- Storage Temperature: -40~85°C
- Operating Humidity : 0~95%
- Storage Humidity: 0~95%
- MTBF: 100,000 calculated hours







Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power	Certificate
▶SBU60-101	3~5VDC	16.6~10.0A	5%	50W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-102	5~6VDC	11.0~9.16A	5%	55W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-103	6~8VDC	10.0~7.50A	4%	60W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-104	8~11VDC	7.87~5.72A	3%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-105	11~13VDC	5.72~4.84A	3%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-106	13~16VDC	4.84~3.93A	3%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-107	16~21VDC	3.93~3.00A	3%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-108	21~27VDC	3.00~2.33A	2%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-109	27~33VDC	2.33~1.90A	2%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-110	33~40VDC	1.90~1.57A	2%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power	Certificate
▶SBU60-111	40~50VDC	1.57~1.26A	2%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-118	110VDC	0.3A	2%	33W	None Safety Approvals
▶SBU60-200	+3.3VDC +12.0VDC	7.0A 3.0A	7% 5%	59.1W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-201	+5.0VDC +12.0VDC	7.0A 3.0A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-201-1	+5.0VDC +12.0VDC	8.0A 0.5A	5% 5%	46W	None Safety Approvals
▶SBU60-201-2	+5.0VDC +12.0VDC	5.00A 3.33A	5% 5%	63W	None Safety Approvals
▶SBU60-201-3	+5.0VDC +12.0VDC	3.0A 4.0A	5% 5%	63W	None Safety Approvals
▶SBU60-202	+5.0VDC +15.0VDC	7.0A 3.0A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-203	+5.0VDC +24.0VDC	7.0A 2.0A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-203-2 +24V(Isolation)	+5.0VDC +24.0VDC	7.0A 2.0A	5% 5%	63W	None Safety Approvals
▶SBU60-203-3	+5.0VDC +24.0VDC	7.0A 1.5A	5% 5%	63W	None Safety Approvals
▶SBU60-204	+3.3VDC +5.0VDC	7.0A 5.0A	7% 5%	48.1W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-215	+5.0VDC -24.0VDC	7.0A 2.0A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-218	+3.3VDC +48.0VDC	5.00A 1.25A	7% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-219	+5.0VDC +28.0VDC	5.0A 2.0A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-219-1	+5.0VDC +28.0VDC	0.5A 2.5A	5% 5%	63W	None Safety Approvals
▶SBU60-220	+5.0VDC +35.0VDC	5.0A 1.5A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-221	+5.0VDC +36.0VDC	5.0A 1.5A	5% 5%	63W	UL/cUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-300	+3.3VDC +12.0VDC -12.0VDC	6.0A 3.0A 0.8A	7% 5% 5%	63W	UL/CUL,T-mark, CE ,CCC, CB, RoHS
▶SBU60-300-1	+3.3VDC +12.0VDC +12.0VDC	6.0A 3.0A 0.8A	7% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-301	+5.0VDC +12.0VDC -5.0VDC	6.0A 3.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-301-1	+5.0VDC +12.0VDC +5.0VDC	6.0A 3.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark ,CE ,CCC, CB, RoHS
▶SBU60-302	+5.0VDC +12.0VDC -12.0VDC	6.0A 3.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power	Certificate
▶SBU60-302-1	+5.0VDC +12.0VDC +12.0VDC	6.0A 3.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-302-2	+5.0VDC +12.0VDC -12.0VDC	6.0A 1.5A 1.5A	5% 5% 5%	63W	None Safety Approvals
▶SBU60-303	+5.0VDC +15.0VDC -15.0VDC	6.0A 3.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-303-1	+5.0VDC +15.0VDC +15.0VDC	6.0A 3.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-304	+5.0VDC +24.0VDC -24.0VDC	6.0A 2.0A 0.5A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-304-1	+5.0VDC +24.0VDC +24.0VDC	6.0A 2.0A 0.5A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-305	+5.0VDC +24.0VDC -12.0VDC	6.0A 2.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-305-1	+5.0VDC +24.0VDC +12.0VDC	6.0A 2.0A 0.8A	5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-306	+3.3VDC +12.0VDC -5.0VDC	6.0A 3.0A 0.8A	7% 5% 5%	59.8W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-306-1	+3.3VDC +12.0VDC +5.0VDC	6.0A 3.0A 0.8A	7% 5% 5%	59.8W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-307	+5.0VDC +10.0VDC -10.0VDC	6.0A 2.0A 1.0A	5% 5% 5%	60W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-307-1	+5.0VDC +10.0VDC +10.0VDC	6.0A 2.0A 1.0A	5% 5% 5%	60W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-308	+3.3VDC +5.0VDC +12.0VDC	5.0A 5.0A 1.0A	7% 5% 5%	53.5W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-308-1	+3.3VDC +5.0VDC -12.0VDC	5.0A 5.0A 1.0A	7% 5% 5%	53.5W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-308-2	+3.3VDC +5.0VDC +12.0VDC	3.9A 2.5A 1.7A	7% 5% 5%	45.77W	None Safety Approvals
▶SBU60-311	+5.0VDC +27.0VDC -15.0VDC	6.0A 2.0A 0.8A	5% 5% 5%	63W	None Safety Approvals

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power 	Certificate 
▶SBU60-312	+3.3VDC +5.0VDC +15.0VDC	7.0A 2.0A 0.5A	5% 5% 5%	40.6W	None Safety Approvals
▶SBU60-313 +24V(Isolation)	+5VDC +12.0VDC +24.0VDC	5.0A 1.0A 1.0A	5% 5% 5%	61W	None Safety Approvals
▶SBU60-315	+5.0VDC +50.0VDC +24.0VDC	0.7A 1.0A 0.1A	5% 5% 5%	55.9W	None Safety Approvals
▶SBU60-317	+5.3VDC +12.6VDC +24.0VDC	6.0A 0.7A 1.0A	5% 5% 5%	63W	None Safety Approvals
▶SBU60-319	+5.0VDC +15.0VDC +12.0VDC	6.0A 3.0A 1.0A	5% 5% 5%	63W	None Safety Approvals
▶SBU60-320	+5.0VDC +55.0VDC +24.0VDC	0.7A 0.91A 0.1A	5% 5% 5%	55.95W	None Safety Approvals
▶SBU60-321	+5.0VDC +16.0VDC -5.0VDC	1.0A 2.0A 1.0A	5% 5% 5%	42W	None Safety Approvals
▶SBU60-331	+6.5VDC +24.0VDC +12.0VDC	6.0A 2.0A 0.8A	5% 5% 5%	63W	None Safety Approvals
▶SBU60-342	+5.5VDC +15.0VDC -15.0VDC	6.0A 3.0A 18.75Ω	5% 5% 5%	63W	None Safety Approvals
▶SBU60-400	+3.3VDC +12.0VDC -12.0VDC -5.0VDC	6.0A 3.0A 0.8A 0.8A	7% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-400-1	+3.3VDC +12.0VDC -12.0VDC +5.0VDC	6.0A 3.0A 0.8A 0.8A	7% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC<, CB, RoHS
▶SBU60-401-1	+5.0VDC +12.0VDC -12.0VDC +5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-401-2	+5.0VDC +12.0VDC +12.0VDC -5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-401-3	+5.0VDC +12.0VDC +12.0VDC +5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-401-4	+5.0VDC +12.0VDC -12.0VDC -5.0VDC	7.0A 2.0A 1.0A 1.0A	5% 5% 5% 5%	63W	None Safety Approvals
▶SBU60-401-5	+5.0VDC +12.0VDC -12.0VDC -5.0VDC	6.0A 0.6A 0.3A 1.8A	5% 5% 5% 5%	49.8W	None Safety Approvals

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power 	Certificate 
▶SBU60-402	+5.0VDC +12.0VDC -12.0VDC +12.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-402-1	+5.0VDC +12.0VDC +12.0VDC +12.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-402-2	+5.0VDC +12.0VDC +12.0VDC -12.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CC, CB, RoHS
▶SBU60-402-3	+5.0VDC +12.0VDC -12.0VDC -12.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-403	+5.0VDC +12.0VDC -12.0VDC +24.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-403-1	+5.0VDC +12.0VDC +12.0VDC +24.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark,CE ,CCC, CB, RoHS
▶SBU60-403-2	+5.0VDC +12.0VDC +12.0VDC -24.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-403-3	+5.0VDC +12.0VDC -12.0VDC -24.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE,CCC, CB, RoHS
▶SBU60-403-4 (Isolation)	+5.0VDC +12.0VDC -12.0VDC +24.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	None Safety Approvals
▶SBU60-404	+5.0VDC +15.0VDC -15.0VDC -5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-404-1	+5.0VDC +15.0VDC -15.0VDC +5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-404-2	+5.0VDC +15.0VDC +15.0VDC -5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-404-3	+5.0VDC +15.0VDC +15.0VDC +5.0VDC	6.0A 3.0A 0.8A 0.8A	5% 5% 5% 5%	63W	UL/CUL, T-mark, CE ,CCC, CB, RoHS
▶SBU60-407	+5.0VDC +12.0VDC +3.3VDC -12.0VDC	2.5A 2.45A 1.0A 0.4A	5% 5% 2% 5%	50W	None Safety Approvals

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power 	Certificate 
▶ SBU60-407-1	+3.3VDC +5.0VDC +12.0VDC -12.0VDC	6.0A 4.0A 2.0A 0.6A	7% 5% 5% 5%	63W	None Safety Approvals
▶ SBU60-423	+5.0VDC +24.0VDC -15.0VDC +12.0VDC	1.0A 1.8A 0.1A 0.8A	5% 5% 5% 5%	59.3W	UL/CUL, T-mark, CE, CCC, CB, RoHS
▶ SBU60-424	+3.3VDC +5.0VDC -30.0VDC -70.0VDC	2.0A 1.5A 0.5A 0.25A	7% 5% 10% 10%	46.6W	None Safety Approvals
▶ SBU60-425	+5.15VDC +12.0VDC +18.0VDC +30.0VDC	4.0A 2.0A 0.4A 0.1A	5% 5% 5% 5%	55W	None Safety Approvals
▶ SBU60-425-1	+5.2VDC +12.1VDC +18.0VDC +30.0VDC	4.0A 3.0A 0.4A 0.1A	5% 5% 5% -10~+40%	63W	None Safety Approvals
▶ SBU60-426	+5.0VDC +5.0VDC +12.0VDC +38.0VDC	3.8A 0.4A 2.9A 0.1A	5% 5% 10% 10%	59.6W	None Safety Approvals