

MPU63 series

63W Desktop type switching power supplies for Medical Equipment



Features


- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Energy Star 2.0, Efficiency level V
- Single Output
- Class I
- 3 year warranty

Electrical characteristics

- Efficiency: 85% typ.
- Line Regulation: 1% max.
- Load Regulation: 7% max.
- Hold-up Time: 16mS min.
- Output ripple and noise: 0.5% (Typ.).

Environmental

- Operating Temperature: 0 to 70°C
- Derate linearly from 100% load at 50°C to 50% load at 70°C
- Storage Temperature: -40~85°C
- Operating Humidity : 0~95%
- Storage Humidity: 0~95%
- MTBF: 100,000 calculated hours

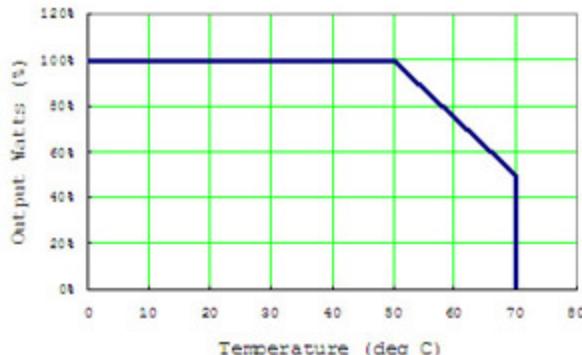

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power	Certificate
►MPU63-102	5VDC	9.00A	7%	45W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, RoHS
►MPU63-103	7VDC	7.85A	7%	55W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, RoHS
►MPU63-104	9VDC	6.44A	5%	58W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, RoHS
►MPU63-105	12VDC	5.25A	5%	63W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, CEC Level V, RoHS
►MPU63-106	15VDC	4.20A	5%	63W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, CEC Level V, RoHS
►MPU63-107	18VDC	3.50A	5%	63W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, CEC Level V, RoHS
►MPU63-108	24VDC	2.62A	3%	63W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, CEC Level V, RoHS
►MPU63-109	30VDC	2.10A	3%	63W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, CEC Level V, RoHS
►MPU63-110	36VDC	1.75A	3%	63W	UL/cUL, TUV T-mark, CE, CB, FCC, CCC, PSE, CEC Level V, RoHS