




Ideal for dc line and countermeasure against radiation noise.

BADGER

S

- Low height and small size SMD.
- Excellent frequency characteristics.

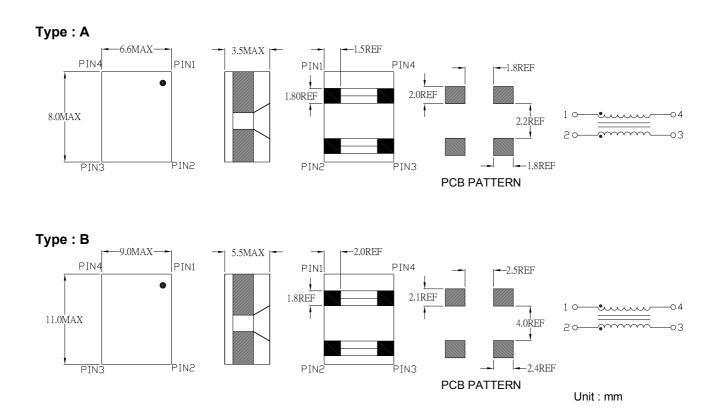

Part No.	Rated current (ADC) MAX	Impedance (at 100MHZ) (Ω) MIN	DCR (Ω max.)	Туре
ET-52701	4.0	250	0.020	А
ET-52702	7.0	550	0.016	В

- 1. Temperature rise currnet : 40°C max.
- 2. Operating temperature : -25° C ~ $+120^{\circ}$ C . (Including self-heat generation by turning the electricity)